



### 适用范围

1. 电泵适用于水力按摩浴缸，海水输送；
2. 输送不含颗粒的弱腐蚀性(弱酸,弱碱)液体

### 特点

- ◆ 电泵的过流部件采用高强度工程塑料，配以优质耐磨机械密封；
- ◆ 71机座，机座与机脚联体，结实可靠；
- ◆ 采用低噪音标准电机；单相电机安装美国TI热保护器；
- ◆ 电机采用耐高温轴承，运行寿命长，可靠耐用；
- ◆ 水与轴完全分离，安全可靠；
- ◆ 可选配气动开关，确保使用方便、安全；
- ◆ F 级绝缘；IPX5 防护等级
- ◆ 整泵通过CE、TUV、SAA 认证

### 工作条件

介质温度：5-50℃  
环境温度：≤40℃  
最大工作压力：0.3MPa



SAA

### Application

1. The pump is most suitable for hydromassage bathtub and Sea water convey;
2. Weak corrosive liquid (weak acid and weak alkali) without solid granules.


### Features

- Electric pump over-current components using high-strength engineering plastics, with high-quality wear-resistant mechanical seal;
- 71 frame, the frame with machine feet conjoined, strong and reliable.
- Pump apply for low noise standard motor. Single-phase with thermal protector from TI, USA.
- Motor is with high temperature bearings, long operating life with reliability and durability.
- Complete separation of water and the axis, safe and reliable.
- Optional pneumatic switch, to ensure ease of use, security.
- Insulation class F, Protection IPX5.
- The pump obtained the certification of CE, TUV, SAA.

### Working conditions

Medium temperature: 5-50℃  
Environmental temperature: ≤40℃  
Max.working pressure: 0.3MPa


性能曲线  
Performance curves

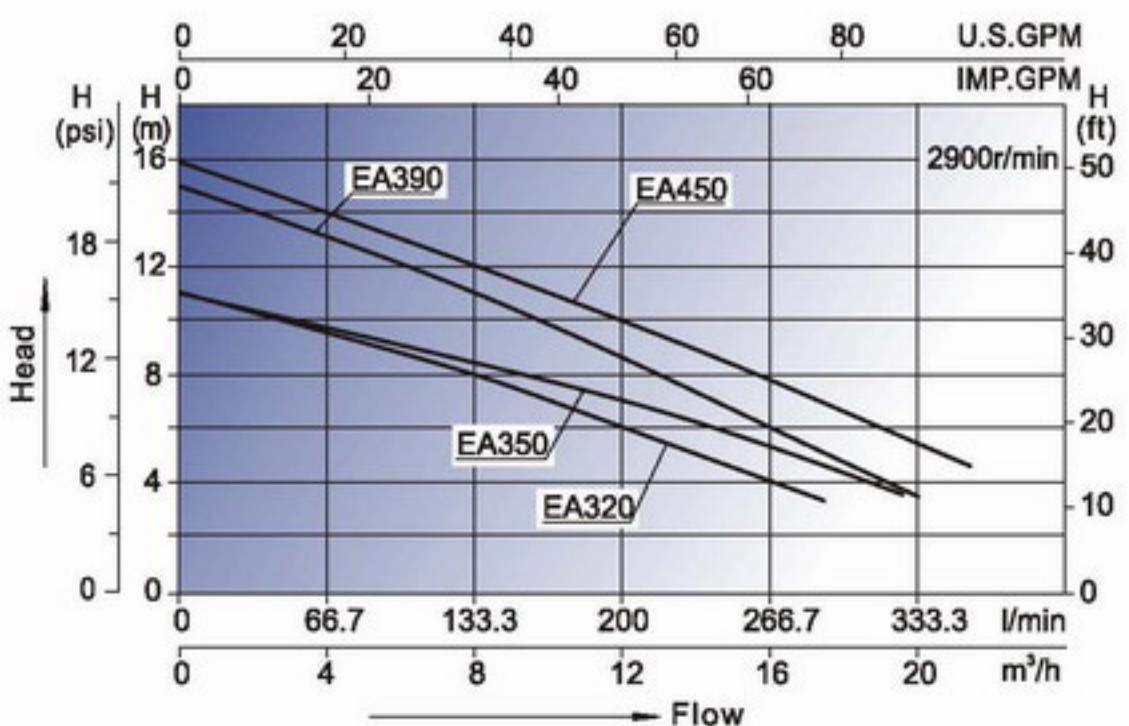

欧洲款  
EUROPEAN TYPE



安装外形图  
Shape and size of Installation

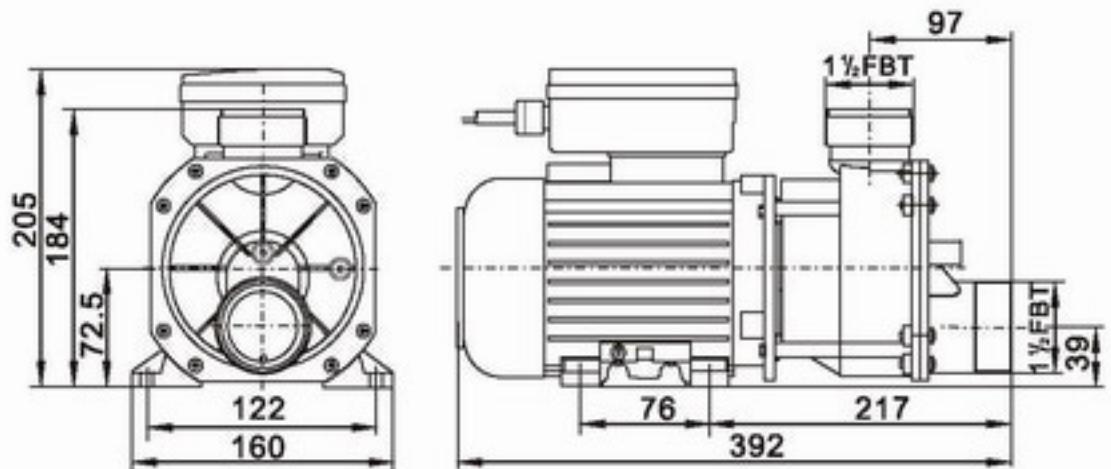

技术参数列表  
Technical parameter list

型号 Model	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	电压/频率 V/Hz	输入功率 Power(P1)		电流 (Amps)	接头尺寸 Fitting size (mm)	重量 (Kg)	包装尺码 Packing size (mm)	装柜数量 (Qty/20')
				kW	HP					
EA320	280	11	220-240/50	0.55	0.75	3.2	48.5or50	9.0	420×180×255	1504
EA350	320	11		0.75	1.0	3.8		9.5		
EA390	335	15		0.9	1.2	4.6		9.8		
EA450	360	16		1.1	1.5	5.8		10.5		

230V/60Hz,110V/60Hz,110V/50Hz models are available on request